

Product code: LM204 AUT PE

Play Centre RAYMOND



4 y



2.25 m




4.59 m




5.47 m



2.97 m

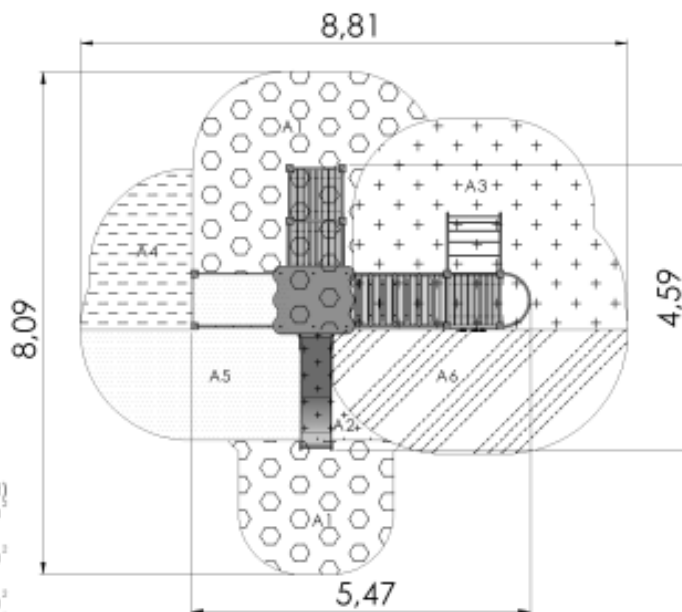

Critical fall height (CFH)
A1: CFH 1,0m - 14,99m²
A2: CFH 1,2m - 1,2m²
A3: CFH 1,55m - 12,9m²
A4: CFH 1,7m - 3,82m²
A5: CFH 1,92m - 7,04m²
A6: CFH 2,25m - 8,09m²
Rubber surface area - 48,04m²
Total area: 48,04m²

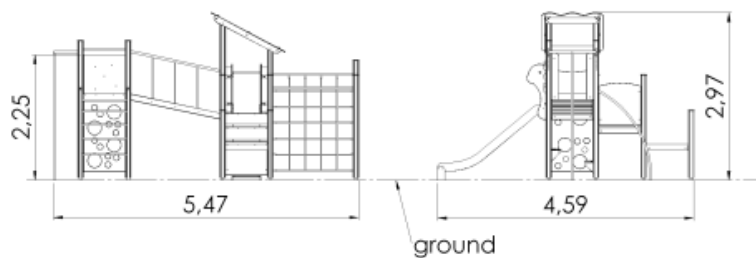

Technical information

Safety area width	8.09 m
Safety area length	8.81 m
Width of structure	4.59 m
Length of structure	5.47 m
Height of structure	2.97 m
Max. fall height	2.25 m
Recommended age of children	4+
For simultaneous use by several children	8-16

Product consists of

Platforms	1 pcs with a height 1.55 m Laminated wood
Platforms	1 pcs with a height 1.2 m Laminated wood
Platforms	1 pcs with a height 0.95 m Laminated wood
Roofs	1 pcs HDPE plastic
Slides	1 pcs with a height 1.2 m Stainless-steel, HDPE plastic sides
Climbing walls	2 pcs HDPE plastic
Climbing nets	1 pcs 16 mm six-strand PES cover braided steel ropes
Ladders	1 pcs Galvanized and powder-coated steel
Bridges	1 pcs
Fireman poles	1 pcs Galvanized and powder-coated steel
Play corners	1 pcs Plastic and wood
Posts	14 pcs Laminated wood
Panels/Plates	5 pcs HDPE plastic
Tubes	4 pcs Galvanized and powder coated steel

Installation info

Installers	2
Installation time	12 h
Volume of concrete	25 bags (25kg)
Package dimensions	2,9x1,1x1,3m
Package weight	480 kg

The product needs a safety surface

A play centre with four platforms, a bridge, a climbing net, a slide, a climbing wall, a fireman's pole and an arched ladder. The play centre can be accessed from the lower platform. The play centre comes equipped with a captain's helm and a play corner with a bench, which can be fitted with either kitchen or car dashboard elements. The higher platform can be reached via the bridge or the arched ladder, a fireman's pole offers an easy way for sliding down. The side panels of the play centre can be switched for various activity walls or thematic printed panels (animals, birds, fish, trees, berries, etc.). The design of the panels will be finalised with the client during ordering.