
Cherry.100 – Product Specification





The ultimate answer to the question why climb a mountain is: "Because it is there!" Climbing is what we do before we find our feet - it's only natural. The Cherry. 100 is a neat little climber that rewards you with some relaxing feet dangling in the upper ring. It is a challenge, especially for smaller kids as the climb is only 1 m high.

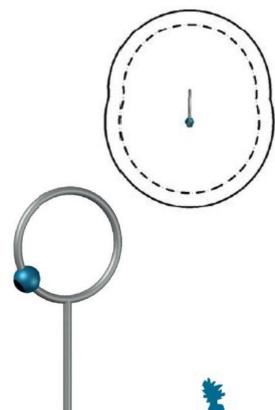

Urban design

Cherry. 100 - at a glance.

Product Family: Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height:

Protective Surfacing Area (DIN EN 1176): Protective Surfacing Area (ASTM 1487):

Minimum space required DIN EN 1176: Minimum space required ASTM 1487:

Playpoints 90.160.201

3+ 1.0 m (3'-4") $1.0 \, \text{m} \times 0.2 \, \text{m} \times 1.9 \, \text{m}$ (3'-4" x 0'-8" x 6'-3")

 $3.2 \, \text{m} \times 3.8 \, \text{m}$ 3.9 m x 4.6 m (12'-10" x 15'-2")

10.0 m²

14.1 m² (152 ft²)

Number of Foundations: Concrete Volume C20/C25:

Number of skilled installers required: Installation Time without foundation:

Dimensions of largest part:

Weight of the heaviest part: Shipping Volume:

Shipping Weight: Spare part guarantee:

Certificate according to DIN EN 1176:

1 pc.

0.22 m³ (7.8 ft³)

2 hours

 $1.0 \, \text{m} \, \text{x} \, 0.2 \, \text{m} \, \text{x} \, 2.3 \, \text{m}$ (3'-4" x 0'-8" x 7'-7")

36 kg (80 lbs) 1.2 m³ (43 ft³) 40 kg (89 lbs) Lifelong

No.: Z2 15 06 10256 232 **TÜV Product Service**

Technical Data.

The following text can also be used for tenders.

Stainless steel tubes, Ø 60.3 mm (2 3/8") connected to a Frameworx®-aluminum ball connector; Ø 250 mm (9-13/16")

Nodes:

Frameworx®-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM- caps

