

## Disk – Product Specification




### Disk


The Disk is a slanted and slightly concave merry-go-round game of skills that will teach a lesson on centrifugal forces. The tilted orientation creates an up-and-down motion as the child spins around helping them learn how to control their movements to sustain the spinning action.



### Disk – at a glance.

Product Family:	<b>Playpoints</b>	Number of Foundations:	<b>1 pc.</b>
Item Number:	<b>90.260.301</b>	Concrete Volume C20/C25:	<b>0.8 m<sup>3</sup> (14.2 ft<sup>3</sup>)</b>
Children's Age:	<b>5+</b>	Number of skilled installers required:	<b>2</b>
Fall Height (DIN EN 1176):	<b>0.8m (2'-8")</b>	Installation Time without foundation:	<b>2 hours</b>
Length x Width x Height:	<b>1.9 m x 1.9 m x 0.8 m (6'-3" x 6'-3" x 2'-8")</b>	Dimensions of largest part:	<b>1.9 m x 1.9 m x 1.0 m (6'-3" x 6'-3" x 3'-4")</b>
Protective Surfacing Area (DIN EN 1176):	<b>7.9 m x 7.9 m</b>	Weight of the heaviest part:	<b>100 kg (221 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>5.5 m x 5.5 m (18'-1" x 18'-1")</b>	Shipping Volume:	<b>4.0 m<sup>3</sup> (142 ft<sup>3</sup>)</b>
Minimum space required DIN EN 1176:	<b>48.2 m<sup>2</sup></b>	Shipping Weight:	<b>140 kg (309 lbs)</b>
Minimum space required ASTM 1487:	<b>23.7 m<sup>2</sup> (256 ft<sup>2</sup>)</b>	Spare part guarantee:	<b>Lifelong</b>
		Certificate according to DIN EN 1176:	<b>No.: Z2 15 06 10256 233 TÜV Product Service</b>

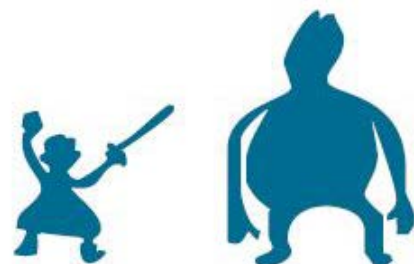

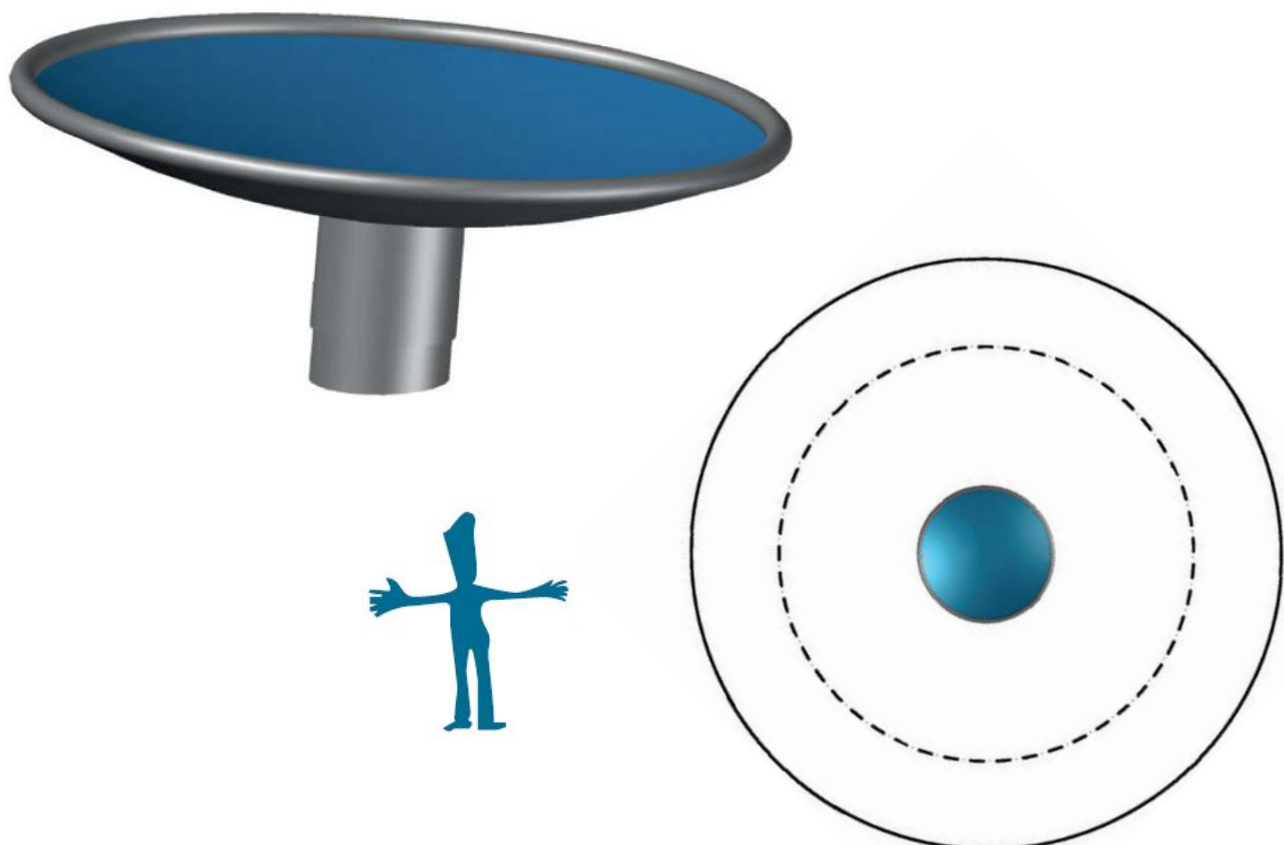

## Technical Data.

The following text can also be used for tenders.

### Turntable:

concave stainless steel bowl  $\varnothing$  1830 mm (6') the cheeks are welded with stainless steel handrails  $\varnothing$  60,3 mm (2 3/8")

### Stand:

5° inclined stainless steel base tube  $\varnothing$  323,9 mm (1'-1") with stainless steel cover tube  $\varnothing$  355,6 mm (1'-1")

### Bearing:

Fully encapsulated bearing

### Coating:

EPDM-rubber-coating area within the Disk

**When following DIN EN 1176 protective surfacing suitable for a free fall height of 1000 mm or more has to be used.**