


## Monkey Jibe – Product Specification



### Monkey Jibe

Fireball Frolicking like monkeys in the jungle is now also possible right in the middle of the city!

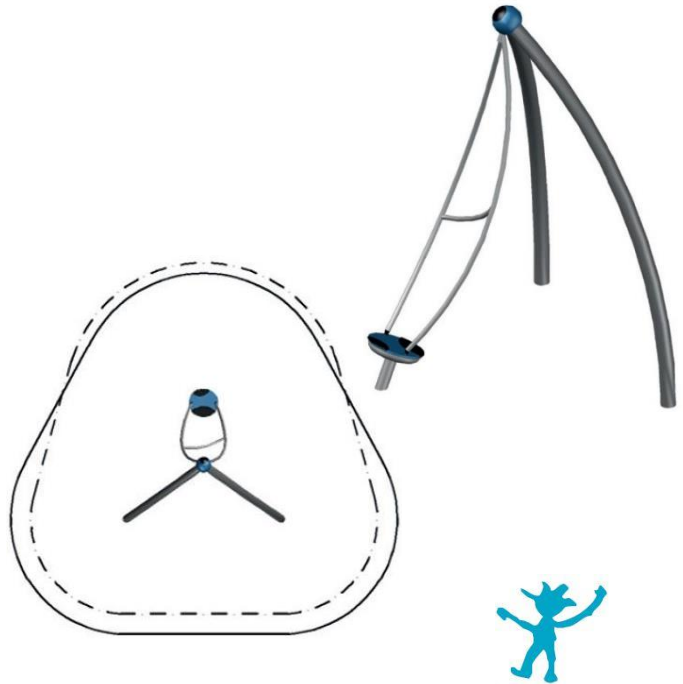

### Monkey Jibe – at a glance.

Product Family:	<b>Playpoints</b>	Number of Foundations:	<b>3 pc.</b>
Item Number:	<b>90.261.100</b>	Concrete Volume C20/C25:	<b>1.58 m<sup>3</sup> (56 ft<sup>3</sup>)</b>
Children's Age:	<b>5+</b>	Number of skilled installers required:	<b>2</b>
Fall Height (DIN EN 1176):	<b>0.5 m (1'-8")</b>	Installation Time without foundation:	<b>4 hours</b>
Length x Width x Height:	<b>2.7 m x 2.3 m x 3.3 m (8'-11" x 7'-7" x 10'-10")</b>	Dimensions of largest part:	<b>4.5 m x 0.7 m x 0.2 m (14'-10" x 2'-4" x 0'-8")</b>
Protective Surfacing Area (DIN EN 1176):	<b>5.7 m x 5.8 m</b>	Weight of the heaviest part:	<b>95 kg (210 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>6.3 m x 7.7 m (20'-8" x 25'-4")</b>	Shipping Volume:	<b>3.2 m<sup>3</sup> (113 ft<sup>3</sup>)</b>
Minimum space required DIN EN 1176:	<b>25.9 m<sup>2</sup></b>	Shipping Weight:	<b>250 kg (552 lbs)</b>
Minimum space required ASTM 1487:	<b>28.4 m<sup>2</sup> (306 ft<sup>2</sup>)</b>	Spare part guarantee:	<b>Lifelong</b>
		Certificate according to DIN EN 1176:	<b>No.: Z2 14 09 10256 224 TÜV Product Service</b>

### Technical Data.

The following text can also be used for tenders.

#### Tubes:

Steel tubes, Ø 127 mm (5"), wall thickness 4 mm (5/32"), anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

#### Turntable:

Stainless steel plate Ø 454 mm (1'-6"), covered with HDPE panels, 19 mm (3/4") thickness

#### Bearing:

Stainless swivel base with double, encapsulated tapered roller bearings, Gondola bottom protected with vandalism resistant Boge Powerjoint, top aligning ball bearing

#### Nodes:

Framework®-aluminum ball connector; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM- cap

#### Gondola:

Bent, welded stainless steel tubes, Ø 40.0 & 42.4 mm (1'-4" & 1'-5")

#### Covering:

Antiskid HDPE panels, 19 mm (3/4") thickness, bolted on the turntable

**When applied to the DIN EN 1176 protective surfacing with shock-absorbing specifications has to be used.**