


Orbit.02 – Product Specification



Orbit.02
The Orbit.02 has one curve more than the Orbit.01. For those who like having a longer balancing challenge from one end to the other.

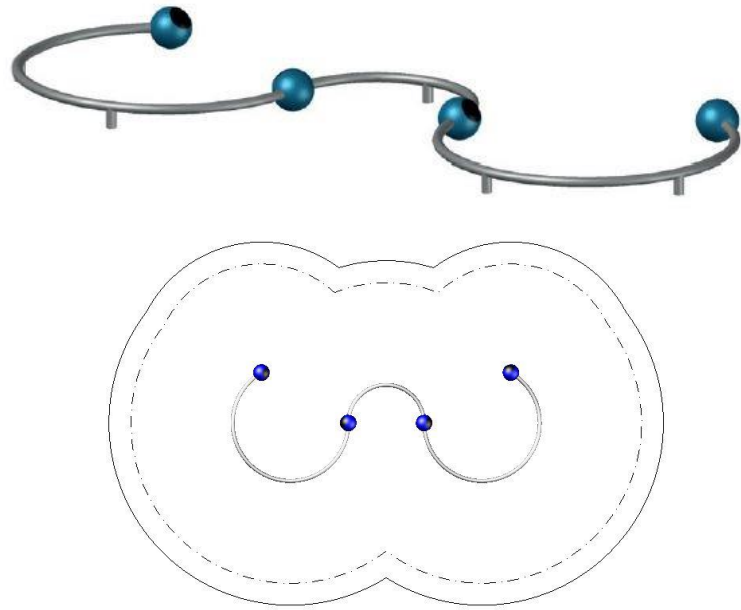

Orbit.02 – at a glance.

| | | | |
|--|--|--|--|
| Product Family: | Playpoints | Number of Foundations: | 0 pc. |
| Item Number: | 90.160.212 | Concrete Volume C20/C25: | - |
| Children's Age: | 3+ | Number of skilled installers required: | 2 |
| Fall Height (DIN EN 1176): | 0.3 m (1'-0") | Installation Time without foundation: | 2 hours |
| Length x Width x Height: | 4.7 m x 1.8 m x 0.3 m (15'-5" x 5'-11" x 1'-0") | Dimension of largest part: | 1.9 m x 1.4 m x 0.7 m (6'-3" x 4'-8" x 2'-4") |
| Protective Surfacing Area (DIN EN 1176): | 7.7 m x 4.8 m | Weight of the heaviest part: | 15 kg (33 lbs) |
| Protective Surfacing Area (ASTM 1487): | 8.4 m x 5.5 m (27'-7" x 18'-1") | Shipping Volume: | 3.2 m³ (113 ft³) |
| Minimum space required DIN EN 1176: | 30.9 m² | Shipping Weight: | 250 kg (552 lbs) |
| Minimum space required ASTM 1487: | 38.3 m² (413 ft²) | Spare part guarantee: | Lifelong |
| | | Certificate according to DIN EN 1176: | No.: Z2 15 07 10256 234 TÜV Product Service |

Technical Data.

The following text can also be used for tenders.

Tubes:

Frameworkx®-stainless steel tubes, Ø 60.3 mm (2 3/8")
connected to a Frameworkx®-aluminum ball connector;
Ø 250 mm (9-13/16")

Nodes:

Frameworkx®-aluminum ball connectors; Ø 250 mm (9-13/16");
anti-corrosion treatment and color finish: sandblasting and
solvent-free zinc-/ epoxy-/ polyester-process; securely closed
with durable EPDM-caps

