
Sky Swing – Product Specification



Sky Swing

People have always been fascinated by the sky and the endless distances above them. Now it is very easy to discover oneself how it is like up there with the Sky Swing.

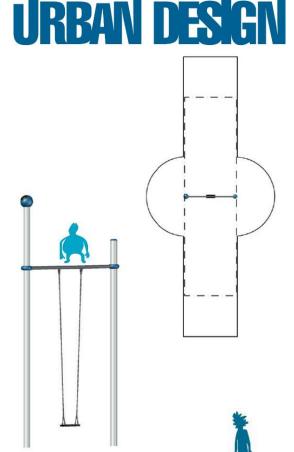

Sky Swing – at a glance.

Product Family: Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height:

Protective Surfacing Area (DIN EN 1176): Protective Surfacing Area (ASTM 1487):

Minimum space required DIN EN 1176: Minimum space required ASTM 1487:

Playpoints 90.260.510

1.92 m (6'-4") 0.3 m x 2.6 m x 4.9 m (1'-0" x 8'-7" x 16'-1")

9.8 m x 2.5 m 13.7 m x 6.3 m (45'-0" x 20'-8")

24.8 m²

47.2 m² (509 ft²)

Number of Foundations: Concrete Volume C20/C25: Number of skilled installers required: Installation Time without foundation:

Weight of the heaviest part: **Shipping Volume:** Shipping Weight:

Dimensions of largest part:

Spare part guarantee: Certificate according to DIN EN 1176: 2 pc. 1.4 m3 (50 ft3)

3 hours

5.7 m x 0.2 m x 0.2 m (18'-9" x 0'-8" x 0'-8")

130 kg (287 lbs) 1.9 m3 (67 ft3) 310 kg (684 lbs) Lifelong

No.: Z2 14 09 10256 223 **TÜV Product Service**

Technical Data.

The following text can also be used for tenders.

Framework:

Two Terranos® posts, Ø 133 mm (5 1/4"), wall thickness 7.1 mm (1/4") with a round cast aluminum post top or Frameworx®aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDMcaps. Stainless steel swing axle, Ø 60.3 mm (2 3/8") wall thickness 5.0 mm (13/64"), connected to the posts with Terranos® aluminum clamps

Swing seat:

The black rubber safety swing seat is by stainless steel chains rotatable mounted to the cross tube mounted in maintenance free nylon bushes



