
Swingo.2.3 – Product Specification

URBAN DESIGN



Swingo.2.3 The bigger one-bay-swing takes a child to new heights. In order to sustain the increased dynamics, the structure is supported by tripods.

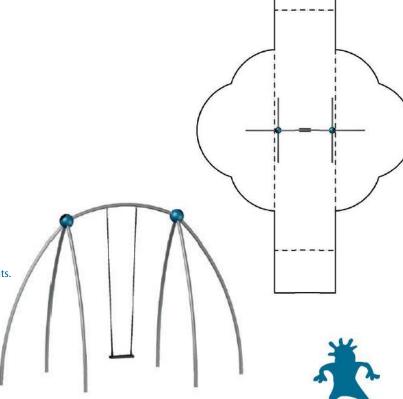

Swingo.2.3 - at a glance.

Product Family: Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height:

Protective Surfacing Area (DIN EN 1176): Protective Surfacing Area (ASTM 1487):

Minimum space required DIN EN 1176: Minimum space required ASTM 1487:

Playpoints 90.260.503 3+ 1.8 m (5'-11")

4.6 m x 2.5 m x 3.2 m (15'-2" x 8'-3" x 10'-6")

9.1 m x 2.4 m 12.3 m x 8.2 m (40'-5" x 26'-11")

21.2 m²

53.0 m² (571 ft²)

Number of Foundations: Concrete Volume C20/C25: Number of skilled installers required: Installation Time without foundation: Dimensions of largest part:

Weight of the heaviest part:
Shipping Volume:
Shipping Weight:
Spare part guarantee:
Certificate according to DIN EN 1176:

6 pc. 0.9 m³ (32 ft³) 2 2 hours

3.8 m x 1.2 m x 0.1 m (12'-6" x 4'-0" x 0'-4") 25 kg (56 lbs)

2.3 m³ (82 ft³) 160 kg (353 lbs) Lifelong

No.: Z2 15 06 10256 231 TÜV Product Service

Technical Data.

The following text can also be used for tenders.

Framework:

Stainless steel tube bends Ø 60.3 mm (2 3/8"), connected to Frameworx®-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM-caps





Swing seat:

The black rubber safety swing seat is by stainless steel chains rotatable mounted to the cross tube mounted in maintenance free nylon bushes